


HP500 Pump

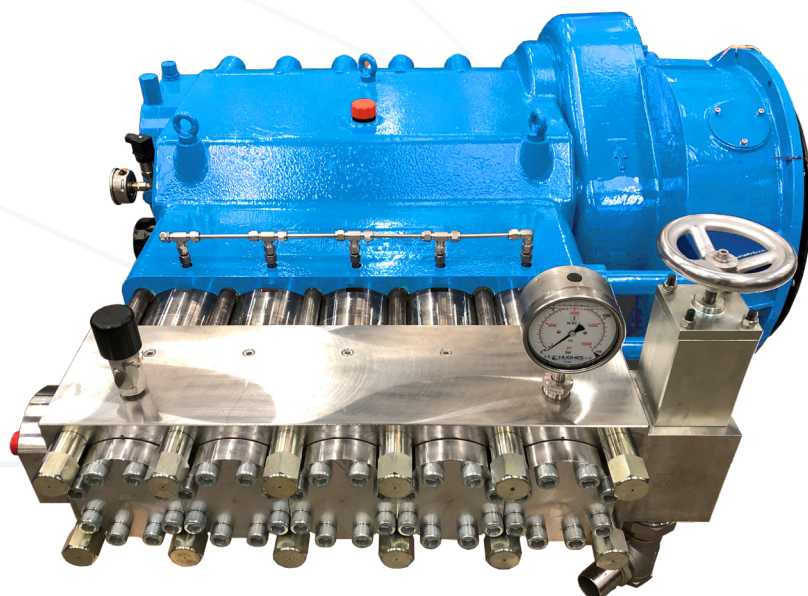

Maximum Power

500HP

375kW



Maximum Pressure

1400bar

at 147lpm

20,300psi at 38.9gpm



Maximum Flowrate

806lpm

at 250bar

213.7gpm at 3,625psi






Features

- 431 stainless steel pump head
- Solid tungsten carbide/ceramic plungers & self adjusting seals
- In-line valve arrangement for maximum efficiency & prevents the adverse effects of cyclic stress in the pumphead.
- Interchangeable plunger kits
- Hardened, alloy steel crankshaft with heavy duty roller & steel backed white metal-main bearings, supported between each connecting rod.
- SG iron crankcase with pressure lubrication, oil filtration & oil cooling.
- Forged connecting rods with low friction, shell type big end bearings and lead bronze lined small end bushes
- Gear driven, eliminating the need for belt drive
- Pressure gauge
- Safety valve or burst disc
- Outstanding seal, plunger & valve life.
- 5 cylinders provide very smooth output.

Options

- Duplex stainless steel pump head for seawater applications (high volume only)
- Choice of gear ratio to suit diesel engine or electric motor drive
- SAE adaptor housing (SAE 1 or 3) for flange mounting the pump to a diesel engine flywheel housing ensuring extremely compact, perfectly aligned installations & enclosing all moving parts.
- Bareshaft pump only or complete unit build
- ATEX compliant

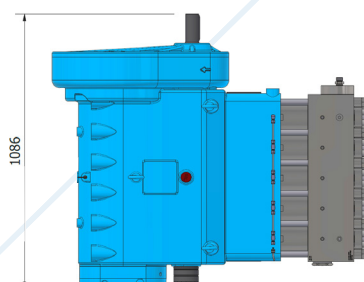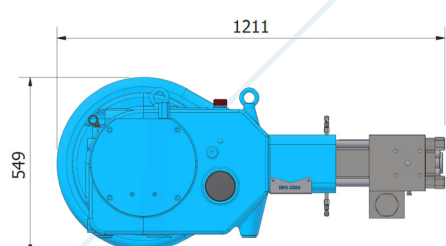

Approx. weight inc oil cooler
1,290kgs (2,838lbs)

Approx. weight inc oil cooler optional SAE housing
1,340kgs (2,948lbs)

HP500 Pump

Plunger Diameter	Gear Ratio Input speed(rpm)		Pump Speed	Power Required		Flow rate		Max Pressure	
mm	1500	1800	rpm	kW	HP	lpm	usgpm	bar	psi
32	5.13		292	306	410	118	31.2	1400	20,300
		5.13	351	367	492	141	37.4		
	4.11		365	382	511	147	38.9		
38	5.13		292	308	413	166	43.9	1000	14,500
		5.13	351	369	495	199	52.7		
	4.11		365	384	515	207	54.9		
45	5.13		292	302	405	233	61.6	700	10,150
		5.13	351	363	486	279	74.0		
	4.11		365	377	506	290	76.9		
50	5.13		292	298	400	287	76.1	560	8,120
		5.13	351	358	480	345	91.3		
	4.11		365	373	499	358	95.0		
60	5.13		292	299	401	413	109.6	390	5,655
		5.13	351	359	482	496	131.5		
	4.11		365	374	501	516	136.8		
70	5.13		292	303	406	563	149.1	290	4,205
		5.13	351	364	487	675	179.0		
	4.11		365	378	507	702	186.1		
75	5.13		292	300	402	646	171.2	250	3,625
		5.13	351	360	482	775	205.4		
	4.11		365	374	502	806	213.7		

Notes 1. Flowrates shown are theoretical and will reduce by approximately 7.5% at full pressure. 2. Pump stroke 100mm
3. Consult Hughes Pumps for required feed conditions. Quintuplex pump (5 Cylinders)

Hughes Pumps Limited
Spring Gardens,
Washington, West Sussex,
RH20 3BS
United Kingdom

Telephone +44 (0) 1903 892358
Email sales@hughes-pumps.co.uk
Web www.hughes-pumps.co.uk



Manufactured in
the UK since 1970

In line with the company's policy of research and development, alterations in design, dimensions and appearance are incorporated from time to time in order to ensure important developments are included at the earliest opportunity. The Company, therefore, reserves the right to alter design, dimensions etc without notice.